PREDICTED ENERGY ASSESSMENT




Plot 38, Willingham Road, Market Rasen, Lincolnshire, LN8 3RE Dwelling type: Bungalow, Detached

Date of assessment: 23/05/2022 Produced by: Jake Eaton Total floor area: 139.35 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

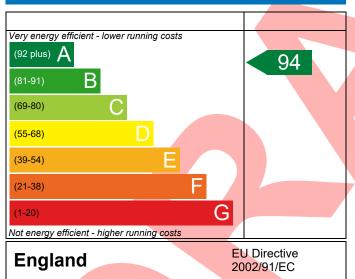

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

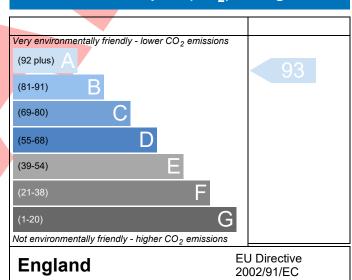

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference LN8 3RE Plot 38				Issued on Date	23/05/2022
Assessment 001	001 Prop Type Ref T5				
Reference					
Property Plot 38, Willingham Road	l, Market Rasei	n, Lincolnshire, LN	8 3RE		
SAP Rating	94 A	DER	8.65	TER	17.28
Environmental	93 A	% DER <ter< td=""><td></td><td>49.95</td><td></td></ter<>		49.95	
CO ₂ Emissions (t/year)	0.95	DFEE	51.47	TFEE	61.60
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>16.44</td><td></td></tfee<>		16.44	
Assessor Details Mr. Jake Eaton, Jake Eaton, T	el: 014002834	71, jake@aeratec	h.co.uk	Assessor ID	P711-0001
Client					
SUMARY FOR INPUT DATA FOR New Build (As De	signed)				
Criterion 1 – Achieving the TER and TFEE rate					
1a TER and DER					
Fuel for main heating	Mains ga	as			
Fuel factor	1.00 (ma	ins gas)			
Target Carbon Dioxide Emission Rate (TER)	17.28			kgCO ₂ /m ²	
Dwelling Carbon Dioxide Emission Rate (DER)	8.65			kgCO ₂ /m ²	Pass
	-8.63 (-4	9.9%)		kgCO ₂ /m ²	
1b TFEE and DFEE					
Target Fabric Energy Efficiency (TFEE)	61.60			kWh/m²/yr	
Dwelling Fabric Energy Efficiency (DFEE)	51.47		,	kWh/m²/yr	
	-10.1 (-1	6.4%)		kWh/m²/yr	Pass
Criterion 2 – Limits on design flexibility					
Limiting Fabric Standards					
2 Fabric U-values					
Element Aver			ghest		
	(max. 0.30) 0.25 (max. 0.70)		Pass		
	(max. 0.25)		14 (max. 0.70	•	Pass Pass
			18 (max. 0.35		
	(max. 2.00)	1.	40 (max. 3.30	J)	Pass
2a Thermal bridging					
Thermal bridging calculated from linear the	ermai transmitt	cances for each jur	iction		
3 Air permeability	E 00 / :			3//1 2) 0 = 2 = 2	
Air permeability at 50 pascals	5.00 (design value)			m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0			m ³ /(h.m ²) @ 50 P	a Pass
Limiting System Efficiencies					
4 Heating efficiency					

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from manufacturer rated ar		
	Combi boiler		
	Efficiency: 89.0% SEDBUK2009		
	Minimum: 88.0%		
Secondary heating system	None		
5 Cylinder insulation			
Hot water storage	No cylinder		
<u>6 Controls</u>			
Space heating controls	Time and temperature zone control	Pass	
Hot water controls	No cylinder		
Boiler interlock	Yes	Pass	
7 Low energy lights			
Percentage of fixed lights with low-energy fittings	100 %		
Minimum	75 %	Pass	
8 Mechanical ventilation			
Not applicable			
Criterion 3 – Limiting the effects of heat gains in sun	nmer		
9 Summertime temperature			
Overheating risk (East Pennines)	Slight	Pass	
Based on:			
Overshading	Average		
Windows facing North	11.76 m², No overhang		
Windows facing East	6.18 m², No overhang		
Windows facing Wast	9.98 m², No overhang		
Windows facing West	3.46 m², No overhang 2.50 ach	_ 	
Air change rate Blinds/curtains		_ 	
billius/ cui tallis	Light-coloured curtain or roller blind, closed 50% of daylight hours		
Criterion 4 – Building performance consistent with D			
Air permeability and pressure testing			
3 Air permeability			
Air permeability at 50 pascals	5.00 (design value) m ³ /(h.m ²) @ 50 Pa		
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass	
10 Key features			
Roof U-value	0.10 W/m²K		
Thermal bridging y-value	0.039 W/m²K		
Photovoltaic array	2.68 kW		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19